

揚聲器製品規格書

SPEAKER SPECIFICATION

Ceramic coaxial


HT-8FDC5136




Model : HT-8FDC5136

mounting information		HF unit			
Overall Diameter	385mm(15in)	sensitivity(1w/1m)	43 Hz	Overall Diameter	393mm(15.5in)
Bolt Circle Diameter	8Ω	Nominal	5.2Ω	Bolt Circle Diameter	374mm(14.7in)
Baffle Cutout Diameter	5.2Ω	Continuous Program	0.31	Baffle Cutout Diameter	354mm(13.9in)
Depth	700w	Voice Coil Diameter	1.13	Depth	1810mm(7.1in)
Flange and Gasket Thickness	1400w	Qts	0.24	Flange and Gasket Thickness	16mm(0.63in)
shipping information	95.7dB	Vas	100 Ltr	shipping information	
Net Weight	5.2kg(12.4 lb)	Sd	855cm ²	Net Weight	3.8kg(8.5lb)
Shipping Weight	100mm (4 in)	Xmax	±5.5mm	Shipping Weight	4.6kg(10.2lb)
Shipping Box	220*220*155mm	Mms	146g	Shipping Box	410*410*190mm
	(8.7*8.7*6.1in)	Bl	25.3 T.m		(16.1*16.1*7.4in)

SPL vs Freq

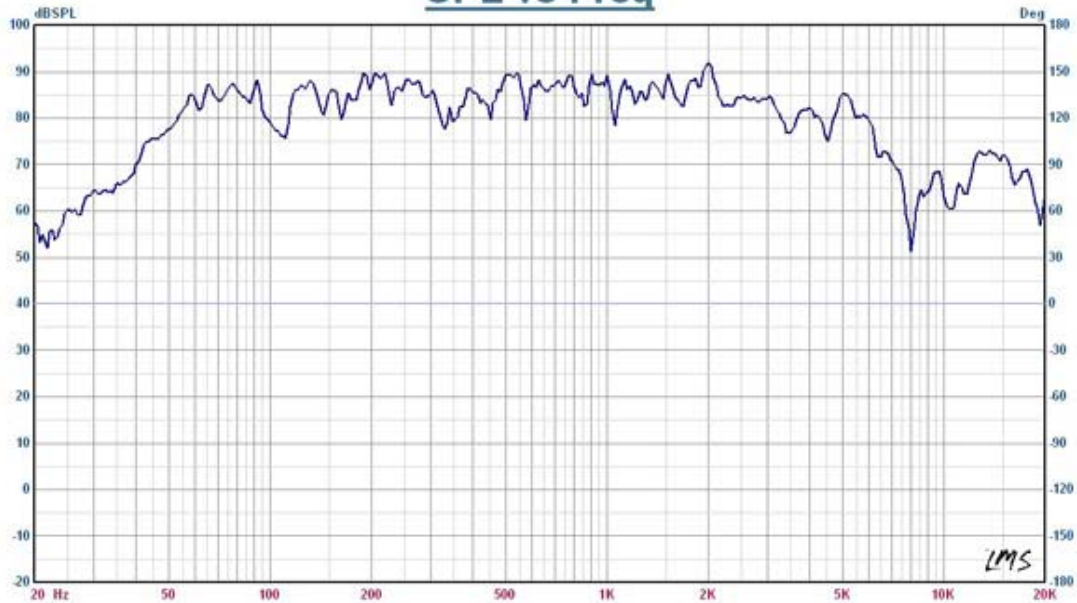

Impedance vs Freq

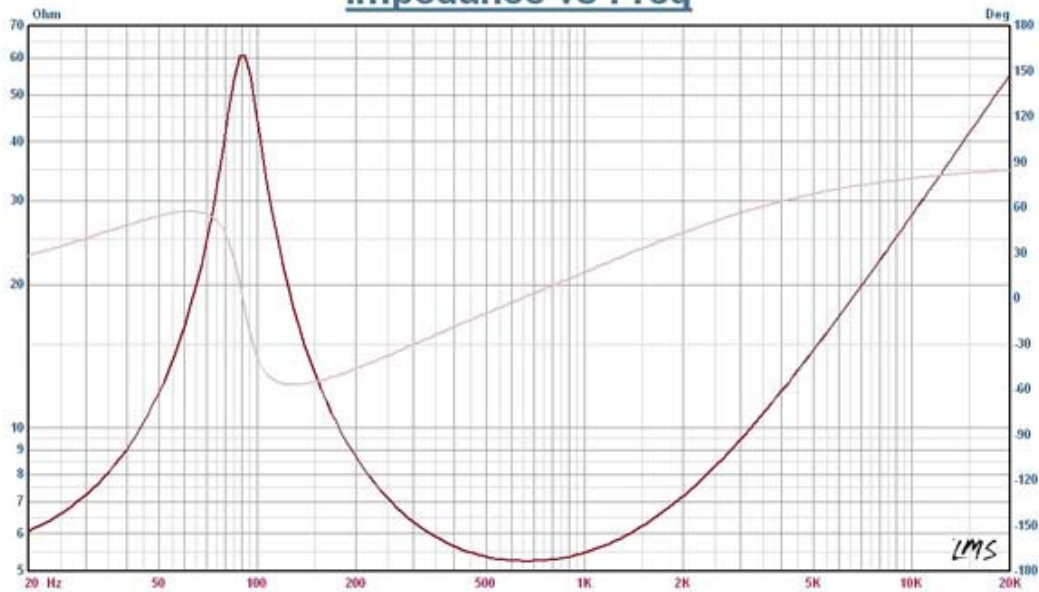

SPL vs Freq

