



匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-01114/ 2005.01.28 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書

SPEAKER SPECIFICATION



型號 Model Number: HT-01114

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	4Ω±15% at 1000 Hz		
2	最低共振周波数 Lowest Resonance Frequency	270 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	150~20000Hz -10dB		
4	出力音压 Output Sound Pressure Level	82dB±3dB 1W/0.5M at (600,800,1K,1.2K)Hz AVE.		
5	入力 Input	定格入力 Rated input 2 W	最大入力 Maximum input 3 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 2.83 V		
8	动作试验电压 Operation Test	Must be normal at program source		
9	极性 Polarity	Diaphragm shall move Forward while Apply a Positive DC Signal to the "+" or "Marked" Terminal.		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 15.5Φ*2.8mm Sub Magnet:	/G	
11	连续负荷试验 Life Test	White noise 2.83Volts. 96 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	60°C±2°C 30%-35%RH 8Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance	-25°C±2°C 96Hours and then room temperature 1 hours		
15	落下试验 Drop Test	75 CM free falling on Concrete floor, 10 times.		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	5% Maximum At 1000Hz 1W		
19	各部 材质	Cone Paper		
		Voice Coil		
		Cap		
20	总重量 Total Weight	15.2G		
	Size: 28mm	Approve:	Check:	Design:
	試作發行: 2005.01.28	Arthur	John	LIU

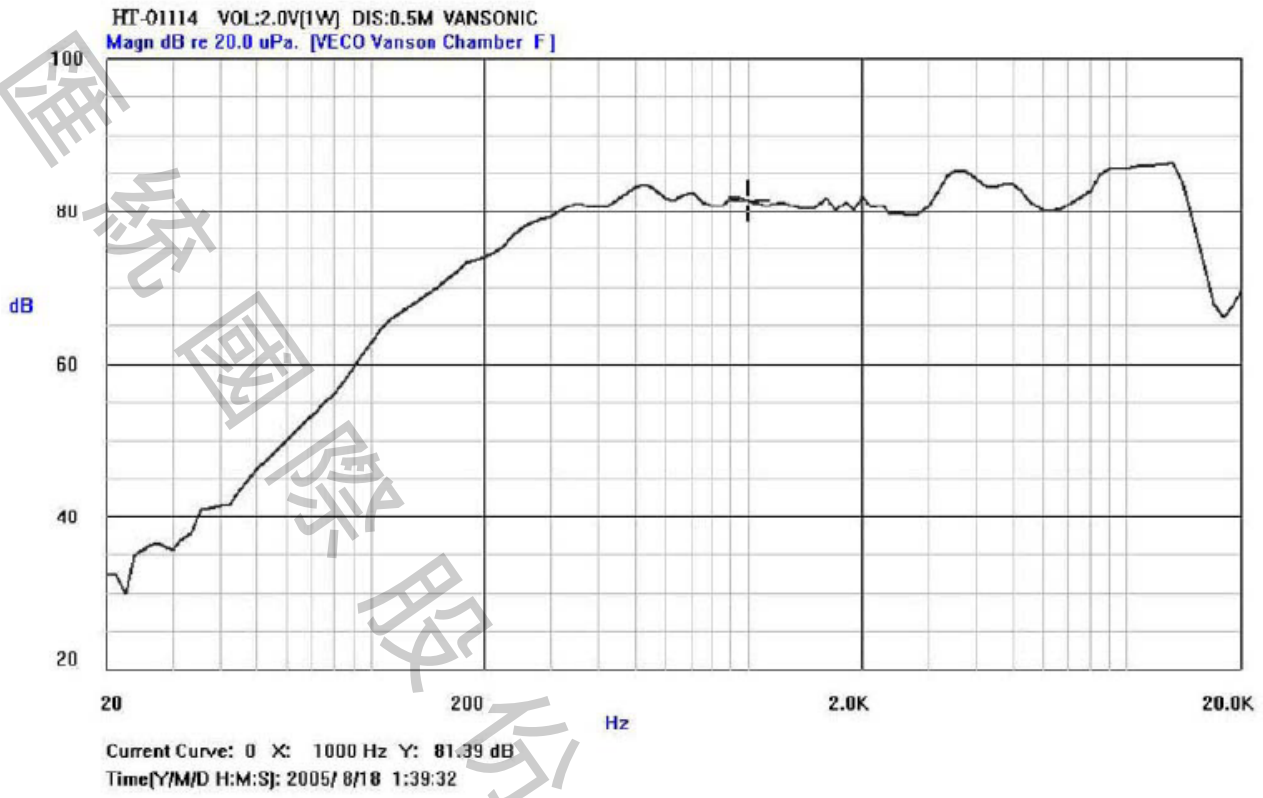

成品圖及照片 Mechanical Dimensions : HT-01114

MOUNTING NOTICE

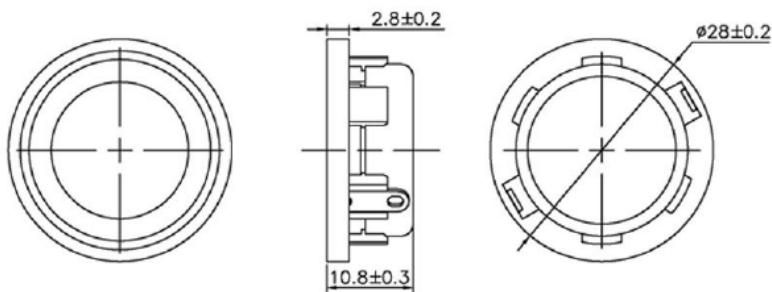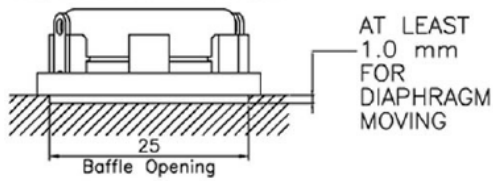

Tolerance:0.5

Unit: mm