

匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-2452B / 2017.11.13 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-2452B

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	4Ω±15%		
2	最低共振周波数 Lowest Resonance Frequency	350 Hz±15%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~18KHz -10dB		
4	出力音压 Output Sound Pressure Level	86±3dB 1M/1W at (200 , 400 , 600 , 800) Hz AVE.		
5	入力 Input	定格入力 Rated input 3W	最大入力 Maximum input 5W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 3.47 V, 300 Hz-5000 Hz		
8	动作试验电压 Operation Test	Must be normal at sine wave 3.47 V/ 300 Hz		
9	极性 Polarity	When a positive volts d.c. is supplied from the speaker terminal marked(+)and a Negative volts to the other terminal the diaphragm must move to toward the front.		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: Φ40 Sub Magnet: /	/G	
11	连续负荷试验 Life Test	Pink noise 5W 48hrs	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	55±2°C 16 Hours		
13	耐湿试验 Humidity Resistance	90-95%RH 48Hours		
14	耐寒试验 Cold Resistance	-20±2°C 8Hours		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	詳見外形圖 See detail from figure chart.		
19	各部 材質	Cone	Paper cone + Foam Edge	
		Voice Coil	Φ13.28 PSV 2L	
		Cap		
20	总重量 Total Weight	120g or oz		
 Size:56*60mm 試作發行: 2017.11.13		Approve: Arthur	Check: John	Design: LIN

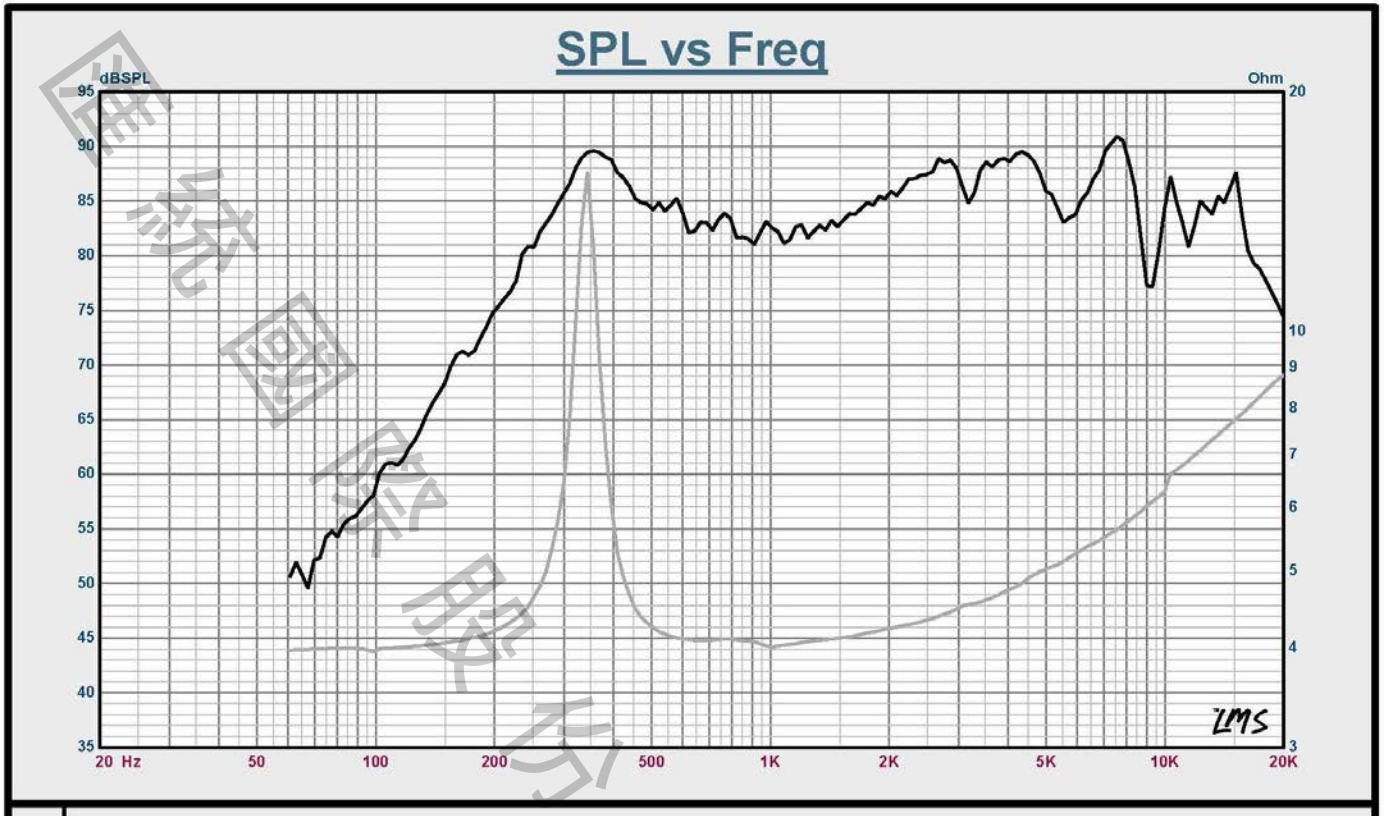

尺寸圖 Mechanical Dimensions : HT-2452B

