


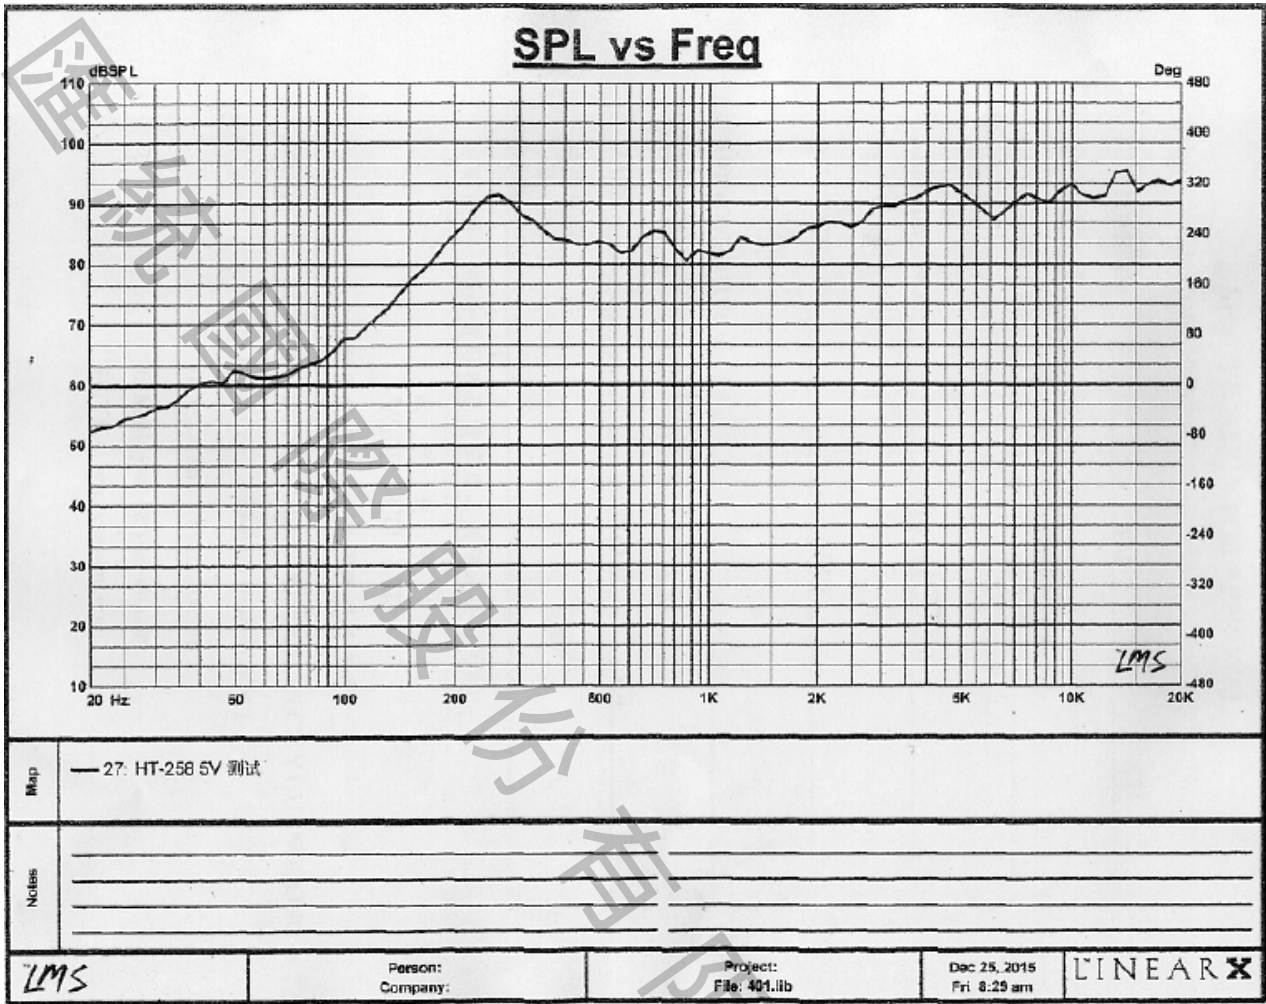
揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-258 (150116)

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	4Ω±15%		
2	最低共振周波数 Lowest Resonance Frequency	200 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~20KHz -10dB		
4	出力音压 Output Sound Pressure Level	83dB±3dB 1M/1W at (400, 500, 600, 800) Hz AVE.		
5	入力 Input	定格入力 Rated input 7W	最大入力 Maximum input 10W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 5 V		
8	动作试验电压 Operation Test	At Program Source 5V		
9	极性 Polarity	從 SPK 端子正極輸入正電流，另一端輸入負電流時，振動板向前推動		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 12.5*4 N35 Sub Magnet: /	/G	
11	连续负荷试验 Life Test	IEC-268-5 noice 7W 4 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70°C±2°C 30%-35%RH 8Hours and then room temperature 1 hour		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 8Hours and then room temperature 1 hour		
14	耐寒试验 Cold Resistance	/		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	/		
19	各部 材质	Cone	Paper cone + Foam Edge	
		Voice Coil	KSV 13.28Φ x4Ω 2層 sv 線 接导 150度	
		Cap	Mylar	
20	总重量 Total Weight	25g		
 Size:52.5mm 試作發行: 2015.12.25		Approve: Arthur	Check: Adele	Design: WANG

音波曲線 Frequency: HT-258 (150116)



成品圖及照片 Mechanical Dimensions : HT-258 (150116)

