



匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HT-4205 / 2015.03.25 Version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number: HT-4205

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	8Ω±15%		
2	最低共振周波数 Lowest Resonance Frequency	90 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0~20KHz -10dB		
4	出力音压 Output Sound Pressure Level	88dB±3dB 1W/1M at (200, 400, 600, 800)Hz AVE.		
5	入力 Input	定格入力 Rated input 20 W	最大入力 Maximum input 30 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 10 V		
8	动作试验电压 Operation Test	/		
9	极性 Polarity	DIAPHRAGM SHALL BE MOVE FORWARD WHEN APPLIES A POSITIVE DC CURRENT TO THE “+” OR MARKED O TERMINAL		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 80*32*15 Sub Magnet:	/G	
11	连续负荷试验 Life Test	PINK NOISE 20W 48 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70°C±2°C 20%-25%RH 48Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 48Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance	-25°C±2°C 48Hours		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	/		
19	各部 材质	Cone Paper	Rubber Edge+ PP+纸盆	
		Voice Coil	ASV 铝管	
		Frame	/	
20	总重量 Total Weight	1.9kg		
	Size: 4吋	Approve: Arthur	Check: Chen	Design: WANG
	試作發行: 2015.03.25			

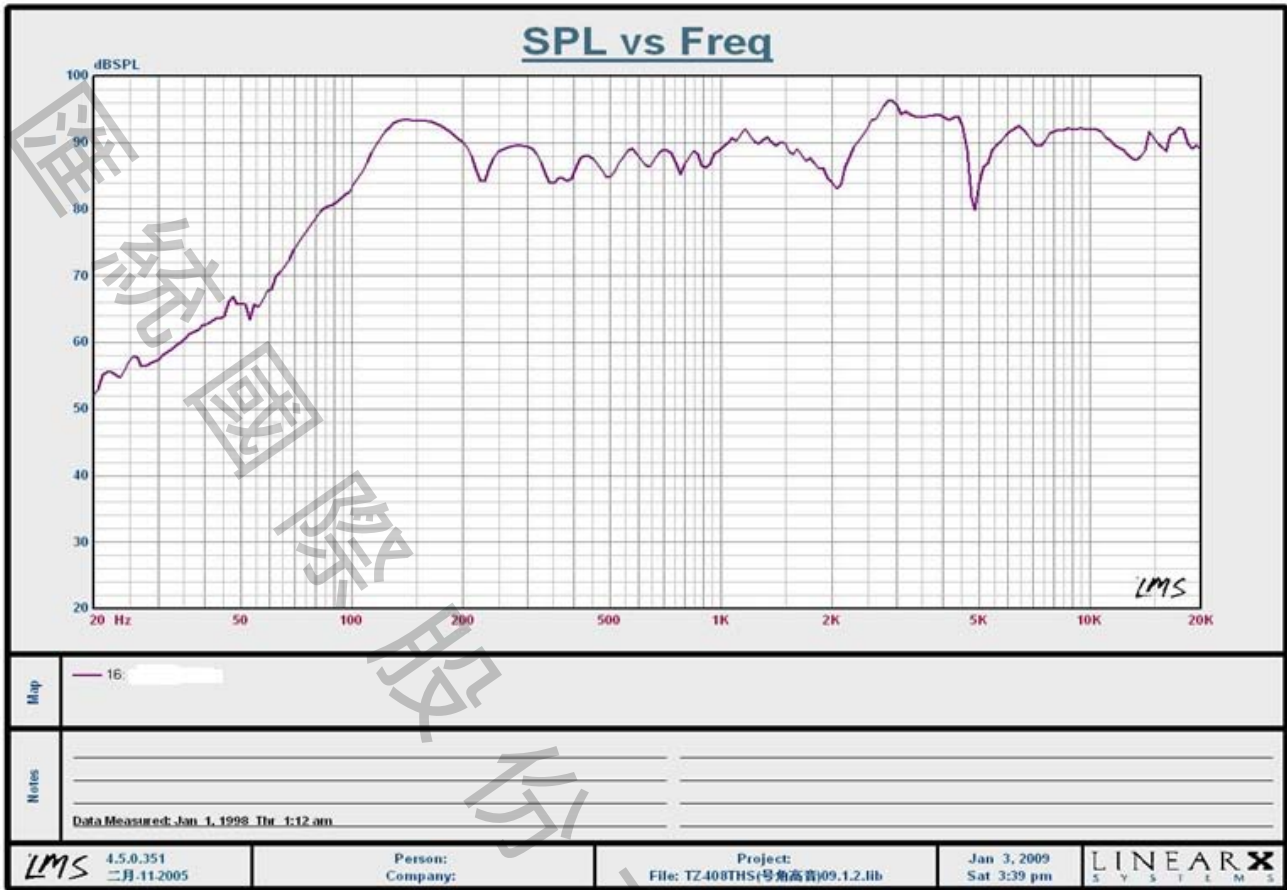

成品圖及照片 Mechanical Dimensions : HT-4205

