



匯統國際股份有限公司  
Huey Tung International Co., Ltd.

# 產品規格書 Specification

[ Model : HT-5260 / 2015.06.12 version ]



**Cara Audio Corporation**

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: [carawang@hueytung.com.tw](mailto:carawang@hueytung.com.tw) / <http://www.hueytung.com.tw>

# 揚聲器製品規格書



## SPEAKER SPECIFICATION

型號 Model Number: HT-5260

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	8Ω±15%		
2	最低共振周波数 Lowest Resonance Frequency	70 Hz±20% Without a baffle		
3	实效周波数带域 Effective Frequency Range	F20Hz~20KHz -10dB		
4	出力音压 Output Sound Pressure Level	88dB±3dB by 2.83V at100cm (600,700,800,900)Hz AVE.		
5	入力 Input	定格入力 Rated input	最大入力 Maximum input	
		30 W	W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	NO CRITICAL BUZZ WITH 8 V. SINE WAVE SIGNAL AT RANGE 20Hz~20KHz THROUGH - Mh FILTER TO HEAR AT OVER 0.3M		
8	动作试验电压 Operation Test	Must be normal at program source		
9	极性 Polarity	/		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet:	G	
		TW:Φ19.5mm*2.5mmt N38 WF:Φ70mm*32mm*10mmt Y30		
11	连续负荷试验 Life Test	30W 15.5V EIA RS-426-B NOISE 8Hr THROUGH	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70°C±2°C 20%-50%RH 24Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 48Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance	/		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	/		
19	各部 材质	Cone Paper	TW: Al+Silk WF: Al+Rubber	
		Voice Coil		
		Cap	/	
20	总重量 Total Weight	1085g (38.27 OZ)		
	Size: 130mm	Approve:	Check:	Design:
	試作發行: 2015.06.12	Arthur	Chen	LIU

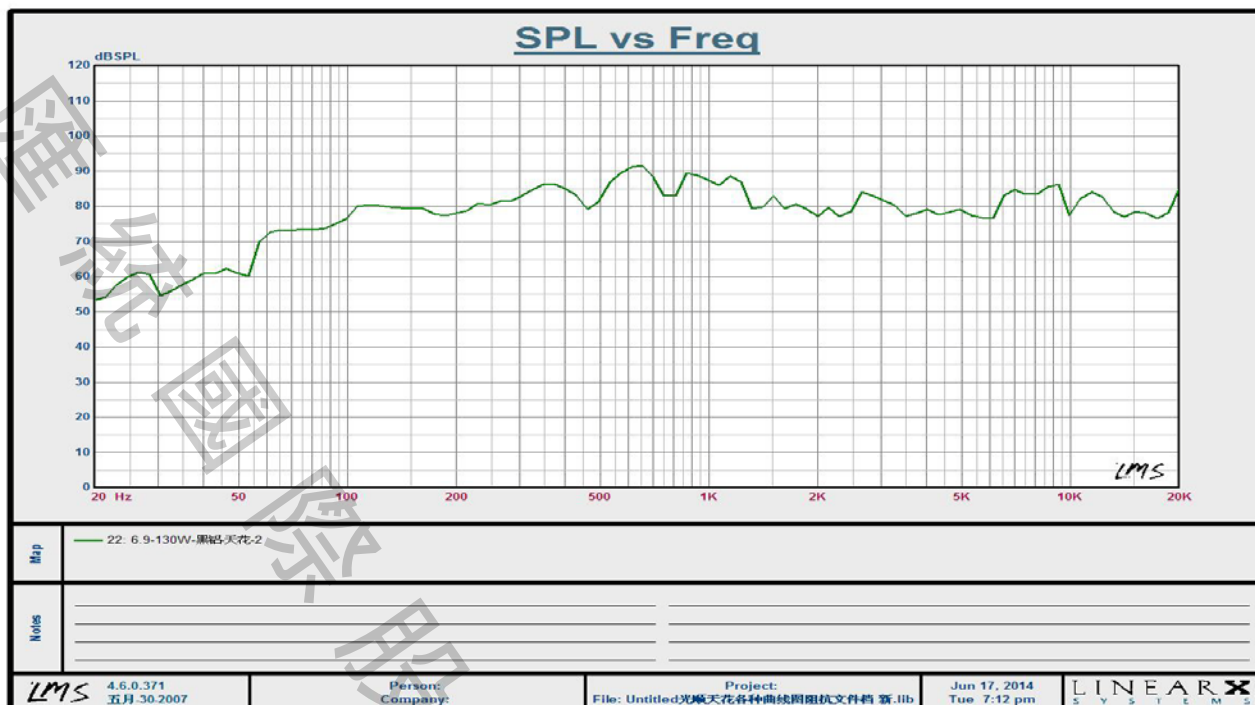

成品圖及照片 Mechanical Dimensions : HT-5260

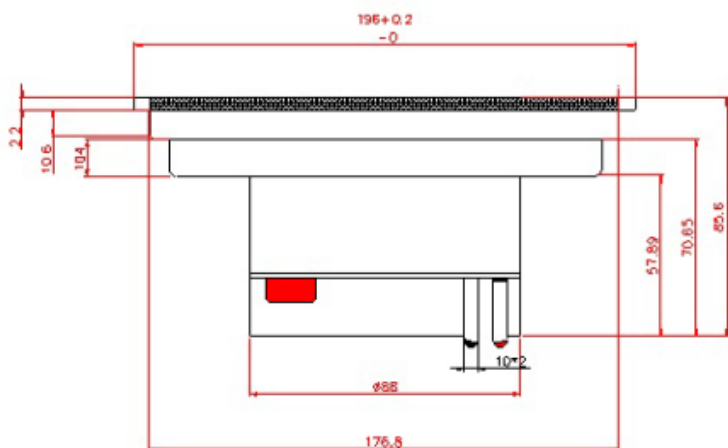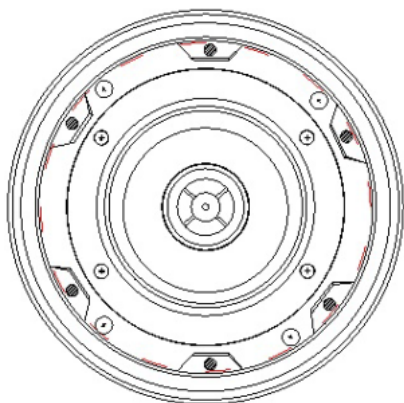

Tolerance:0.5  
Unit: mm