



匯統國際股份有限公司  
Huey Tung International Co., Ltd.

# 產品規格書 Specification

[ Model : HT-6933 / 2015.9.9 version ]



**Cara Audio Corporation**


No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.

Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: [carawang@hueytung.com.tw](mailto:carawang@hueytung.com.tw) / <http://www.hueytung.com.tw>

# 揚聲器製品規格書

## SPEAKER SPECIFICATION

型號 Model Number: HT-6933				
項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	4Ω±15% at 20°C 500Hz 100mA		
2	最低共振周波数 Lowest Resonance Frequency	82 Hz±20%Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F0-20KHz		
4	出力音压 Output Sound Pressure Level	88dB±3dB 1W/1M at ( 1000 , 1200 , 1500 , 2000 ) Hz AVE.		
5	入力 Input	定格入力 Rated input 80W	最大入力 Maximum input 160W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave		
8	动作试验电压 Operation Test	Must be normal		
9	极性 Polarity	When a positive DC current is applied title voice coil terminal marked the diaphragm shall move forward		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 100x45x20 Y30 Sub Magnet:	21.2 oz	
11	连续负荷试验 Life Test	80W 24 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70°C±2°C 20%-50%RH 96Hours and then room temperature 1 hour		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 96Hours and then room temperature 1 hour		
14	耐寒试验 Cold Resistance	-30°C±2°C 96Hours		
15	落下试验 Drop Test	60cm at 60°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	1.2fo<f≤500Hz 時 ≤7% ; 500<f≤5000Hz 時 ≤3%		
19	各部 材质	Cone Paper	W: PP. injection + Rubber Edge T: 66mm PEI	
		Voice Coil	KSV 38mm	
		Cap	/	
20	总重量 Total Weight			
	Size: 255mm*164mm 75mmH 試作發行: 2015.09.09	Approve: Arthur	Check: John	Design: WANG

音波曲線 Frequency: HT-6933

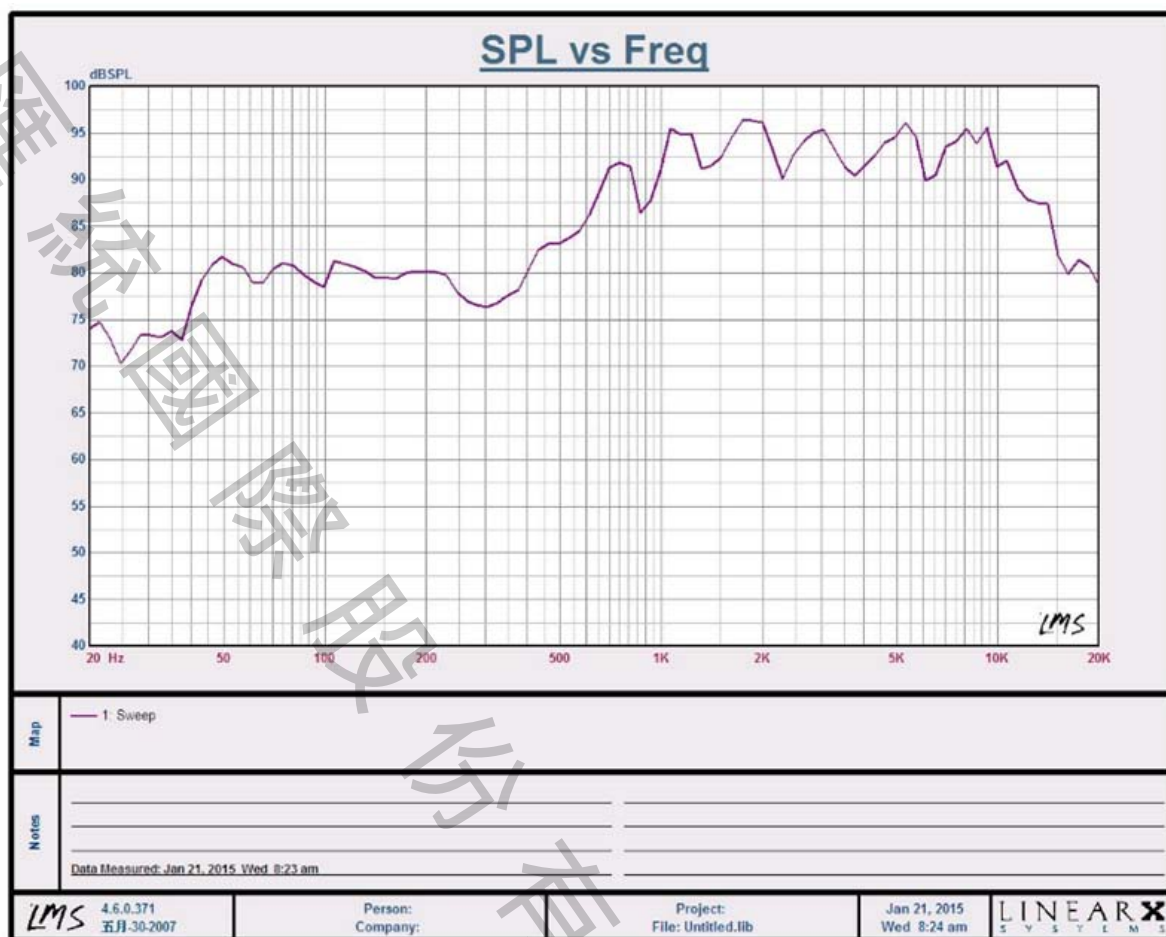

成品圖及照片 Mechanical Dimensions : HT-6933

