



匯統國際股份有限公司
Huey Tung International Co., Ltd.

產品規格書 Specification

[Model : HTPA -6217 / 2013.5.28 version]



HTPA-6217



Cara Audio Corporation


No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.



Tel: 886-7-310 5786 / Fax: 886-7-310 0783


E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>

揚聲器製品規格書 SPEAKER SPECIFICATION

型號 Model Number:HTPA-6217

項目 Items		規格 Specification			
1	公称阻抗 Nominal Impedance	8Ω±15% at 200 Hz 1.0v			
2	最低共振周波数 Lowest Resonance Frequency	40 Hz±15Hz Without a baffle			
3	实效周波数带域 Effective Frequency Range	F40~20KHz -10dB			
4	出力音压 Output Sound Pressure Level	88dB±2dB 1W/1M at (200,300,400,500)Hz AVE.			
5	入力 Input	定格入力 Rated input 20 W	最大入力 Maximum input 40 W		
6	磁束密度 Flux Density	-----±10% GAUSS			
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 8.9 V			
8	动作试验电压 Operation Test	Must be normal at program source 10 W			
9	极性 Polarity	Positive + (Right) Hand Terminal			
10	磁石尺寸/重量 Magnet Dimension/Weigh	(WF)Magnet: φ80*40*15 (TW)Magnet: φ24.5*3.5	282.7 G (9.99 OZ) 8.081 G (0.285 OZ)		
11	连续负荷试验 Life Test	EIA RS-426A noise 20 W 8 hours	After the Test, Speaker should be meet the Outside and item 7,8		
12	耐热试验 Heat Resistance	70°C±2°C 20%-50%RH 24Hours and then room temperature 1 hours			
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 48Hours and then room temperature 1 hours			
14	耐寒试验 Cold Resistance	-25°C±2°C 24Hours and then room temperature 1 hours			
15	落下试验 Drop Test	1M 75°±2°			
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上			
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing			
18	失真率 Distortion	5% less than at 20W 200 Hz			
19	各部 材质	Cone Paper	WF: Grey PPCone+Rubber Edge ; TW: Silk		
		Voice Coil	WF:ASV φ 25.5 ; TW: ASV φ 25.5		
		Cap	/		
20	总重量 Total Weight	1200 G (42.4 OZ)			
		Size: 6.5" 試作發行: 2005.08.10	Approve: Arthur	Check: Tang	Design: LIU

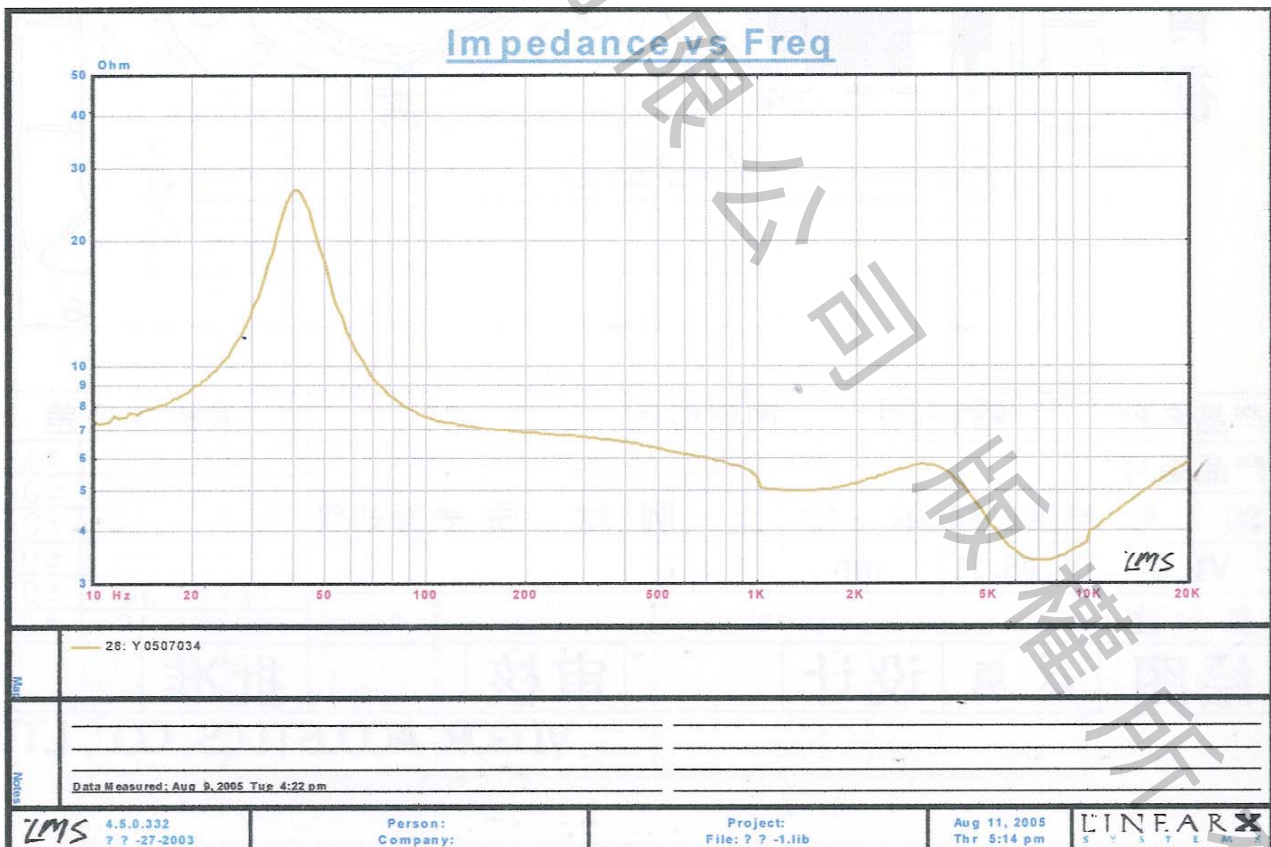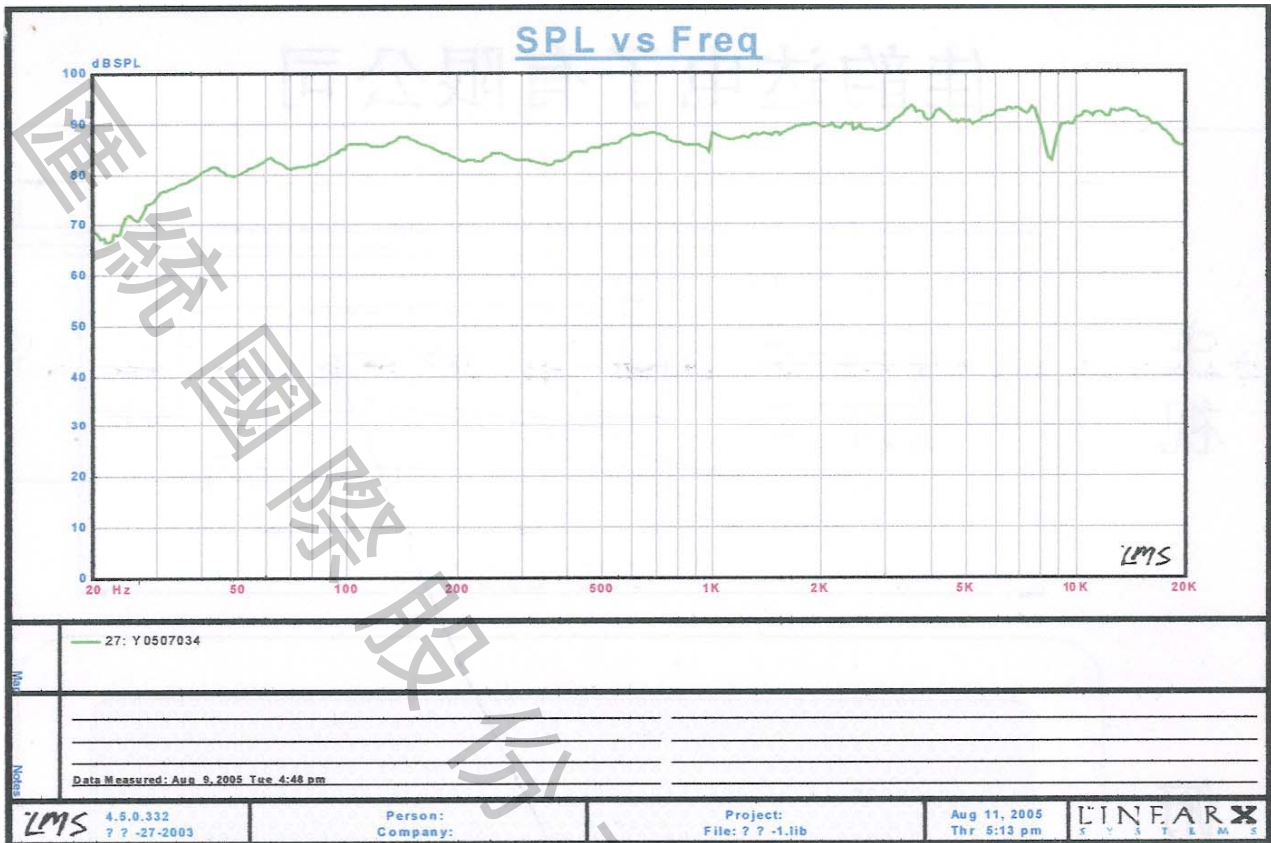

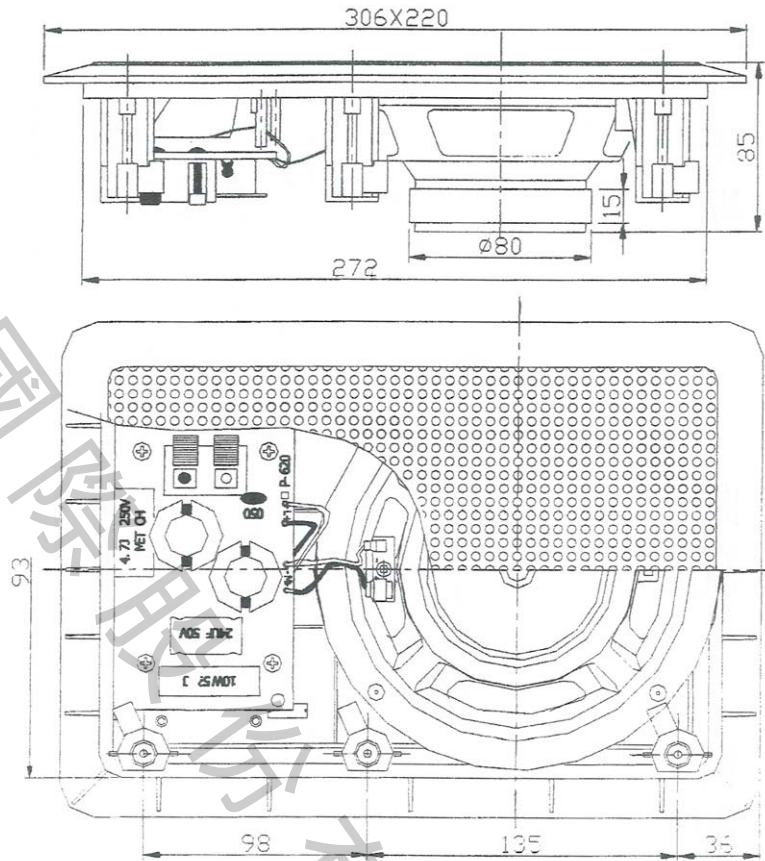

HTPA-6217

Toerance: ± 0.5

Unit:mm