



匯統國際股份有限公司

Huey Tung International Co., Ltd.

產品規格書

Specification

[Model : HTPA-8129 / 2013.4.1 version]



Cara Audio Corporation

No.69, Lane 762, Dingzhong Road, Sanmin District, Kaohsiung City, Taiwan, ROC.


Tel: 886-7-310 5786 / Fax: 886-7-310 0783



E-mail: carawang@hueytung.com.tw / <http://www.hueytung.com.tw>


揚聲器製品規格書

SPEAKER SPECIFICATION

型號 Model Number:HTPA-8129

項目 Items		規格 Specification		
1	公称阻抗 Nominal Impedance	8Ω±15% at 200 Hz 1.0v		
2	最低共振周波数 Lowest Resonance Frequency	50 Hz±15Hz Without a baffle		
3	实效周波数带域 Effective Frequency Range	F50~20KHz -10dB		
4	出力音压 Output Sound Pressure Level	88dB±2dB 1W/1M at (200,300,400,500)Hz AVE.		
5	入力 Input	定格入力 Rated input 45 W	最大入力 Maximum input 90 W	
6	磁束密度 Flux Density	-----±10% GAUSS		
7	异常音试验电压 Buzz & Rattle Test	Must be normal at sine wave 12.6 V		
8	动作试验电压 Operation Test	Must be normal at program source 20 W		
9	极性 Polarity	Positive + (Right) Hand Terminal		
10	磁石尺寸/重量 Magnet Dimension/Weigh	Magnet: 90*50*15 (WF) Sub Magnet: 12.5*2 (TW)	329.8 g (11.7 OZ) 1.70 g (0.06 OZ)	
11	连续负荷试验 Life Test	EIA RS-426A noise 18.9V 8 hours	After the Test, Speaker should be meet the Outside and item 7,8	
12	耐热试验 Heat Resistance	70°C±2°C 20%-50%RH 24Hours and then room temperature 1 hours		
13	耐湿试验 Humidity Resistance	40°C±2°C 90%-95%RH 48Hours and then room temperature 1 hours		
14	耐寒试验 Cold Resistance	-25°C±2°C 24Hours and then room temperature 1 hours		
15	落下试验 Drop Test	1M 75°±2°		
16	绝缘耐压试验 Insulation Resistance	Or more 1MΩ 以上		
17	周波数特性 Frequency Response Curve	参照附图 On Other Drawing		
18	失真率 Distortion	5% less than at 45W 200 Hz		
19	各部 材质	Cone Paper	1.(WF) Grey P.P cone+Rubber 2.(TW) Mlyar	
		Voice Coil	1.(WF)ASV φ25.5 2.(TW) ASV φ13.28	
		Cap	/	
20	总重量 Total Weight	1300g (45.9 OZ)		
	Size: 8"	Approve:	Check:	Design:
	試作發行: 2005.08.11	Arthur	Chen	LIU

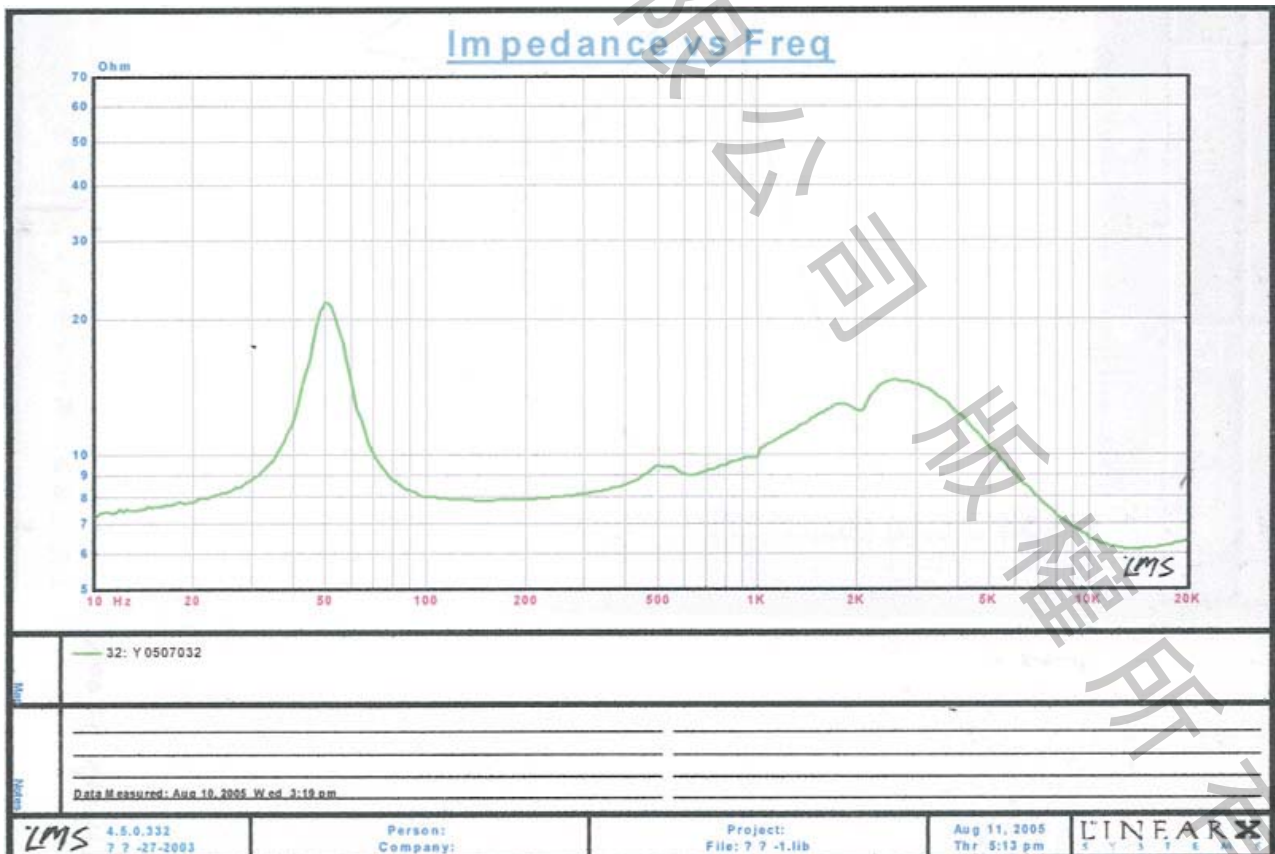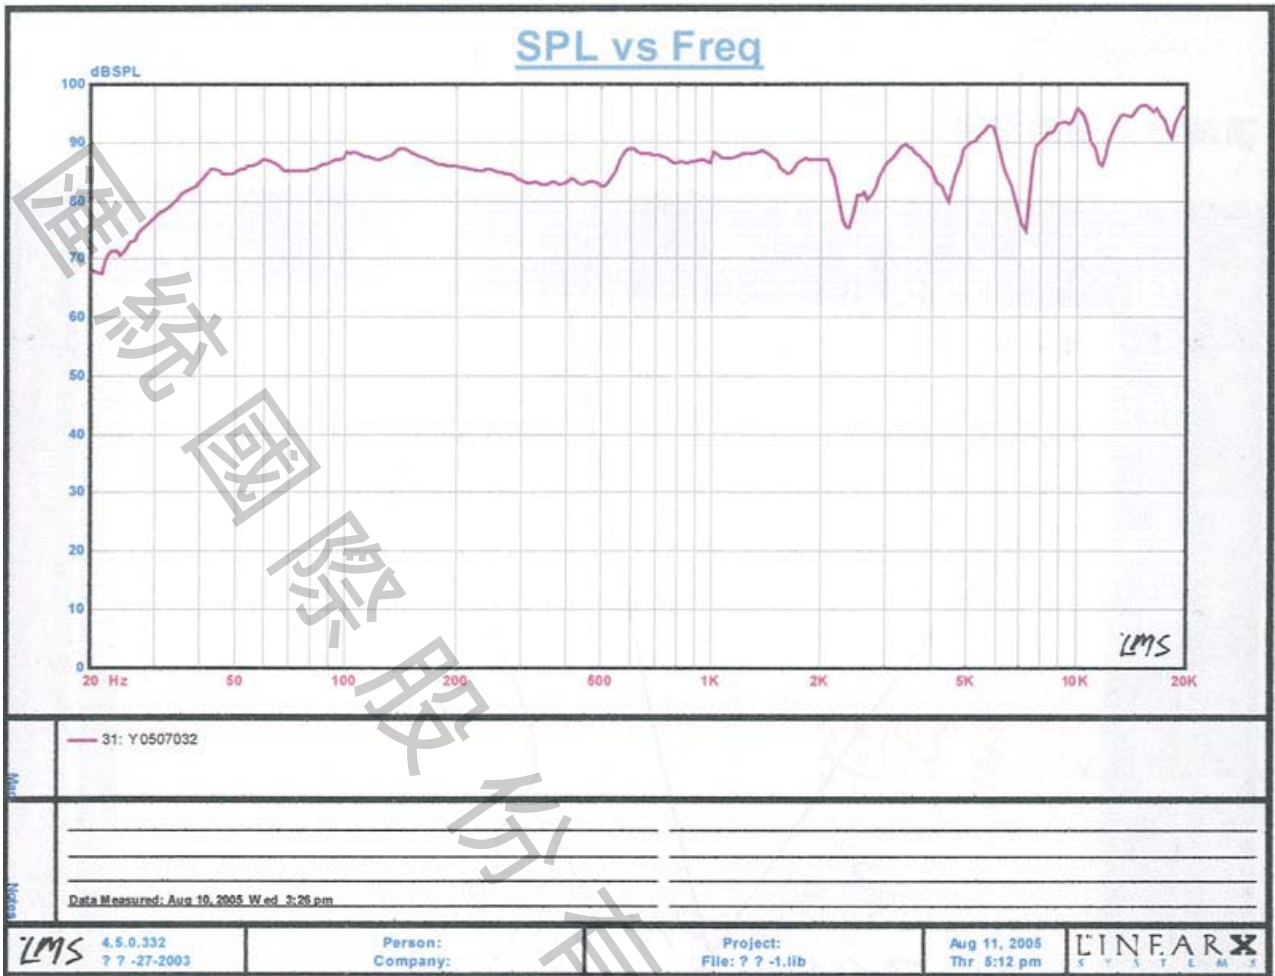

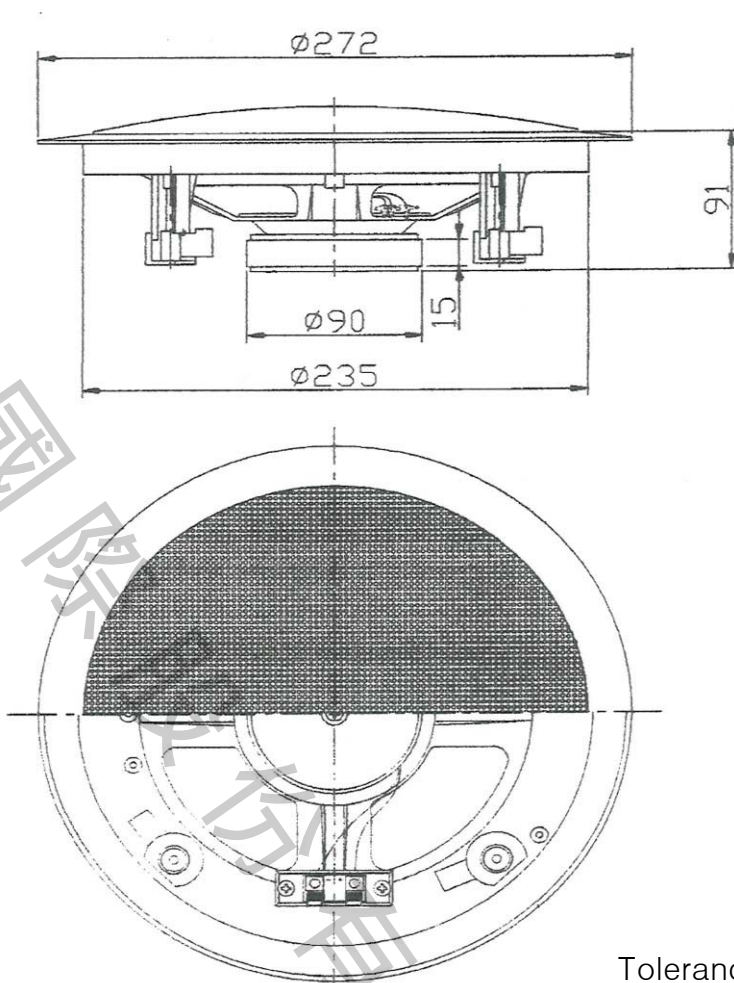

Tolerance:0.5
Unit: mm



HTPA-8129